
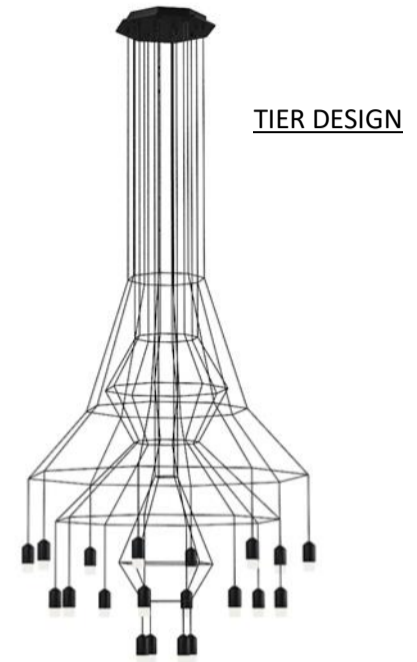
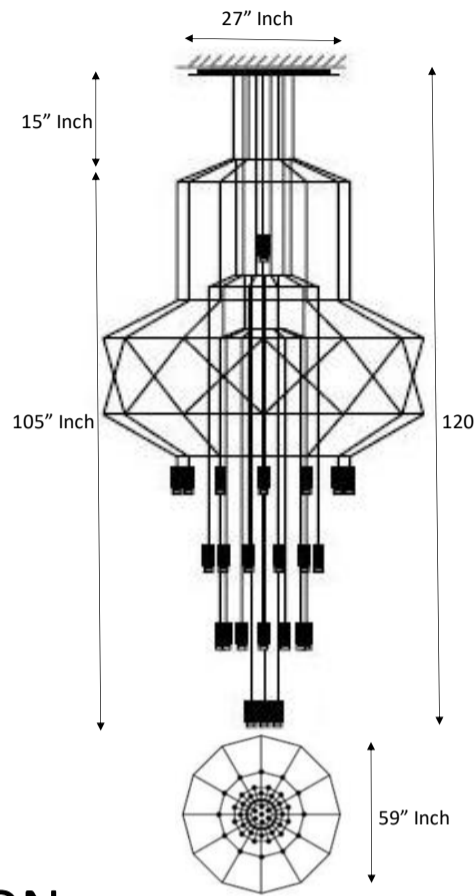


Catalog #		Type
Project		
Comments		Date
Prepared By		

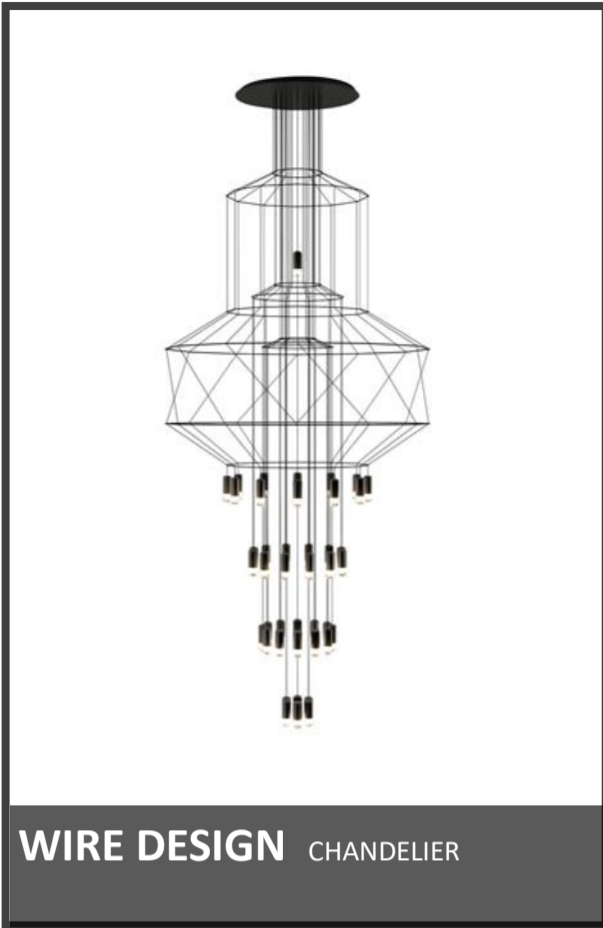

For more design option please see next page

## ORDERING INFORMATION

FINISH	CRI	CCT	ELECTRICAL	Material
1 - Black	1 - $\geq 80$	1 - 2700K 2 - 3000K 3 - 4000K	1 - 120V 2 - 277V	1 - Rosette: <b>Metal</b> 2 - Pipes: <b>Metal</b> 3 - Lampholder : <b>Aluminum</b> 4 - Diffuser: <b>Acrylic</b>

## SPECIFICATIONS

### Application

Pendants

### Diffuser

**Acrylic**

### Driver:

350mA / TCI / MAXI JOLLY US DALI  
50/100 / 127V / 50 / 60Hz

### Installation type

Surface mounted

### Technical characteristics

Cable can be adjusted in the field.

### Optional

SMART adjustment  
Physical characteristics

## ELECTRICAL

Driver included: CC - Constant Current 350 mA 100-240V 50 / 60Hz

Wattage: 20 x G9 LED 4.5W 350mA

Light Source: Solid State Integral LED

Color Temp. (CCT): 3000K - 6000K

Lumen Output: 3933 lm 60 lm / W

Dimming Type: TRIAC / ELV . (1-10V available on request)

## DESIGN OPTIONS

